


Note:-

• Accessories provided with FCM

- a) Set of Hose Fittings - 01 set.
- b) Mounting Frame - 01 No.
- c) Grouting Fastener
- d) Oil Pressure Switch - 01No.
- e) Instruction Manual - 01No.

• Accessories to be provided by customer

- a) All Hoses As Shown - 03 Nos.
- b) 12V DC Cranking Battery - 01 No.

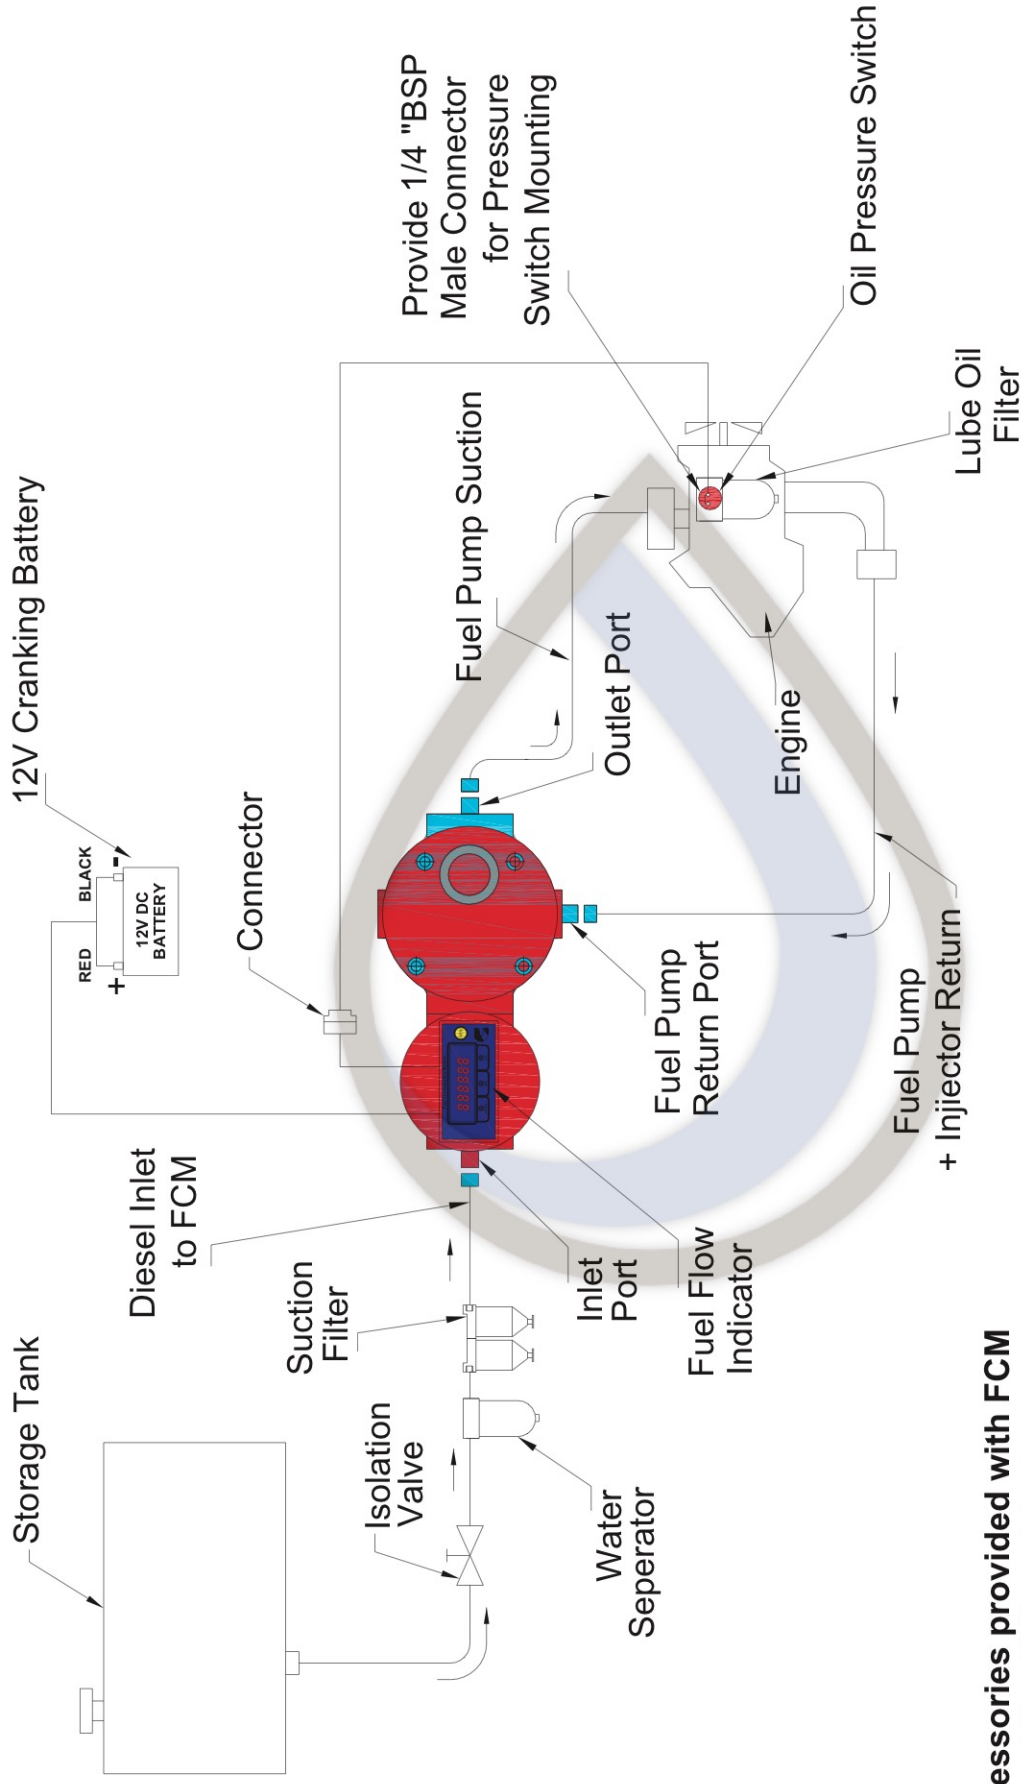


Note:-

• Accessories provided with FCM

- a) Set of Hose Fittings - 01 set.
- b) Mounting Frame - 01 No.
- c) GROUTING Fastener
- d) Oil Pressure Switch - 01No.
- e) Instruction Manual - 01No.

• Accessories to be provided by customer

- a) All Hoses As Shown - 03 Nos.
- b) 12V DC Cranking Battery - 01 No.

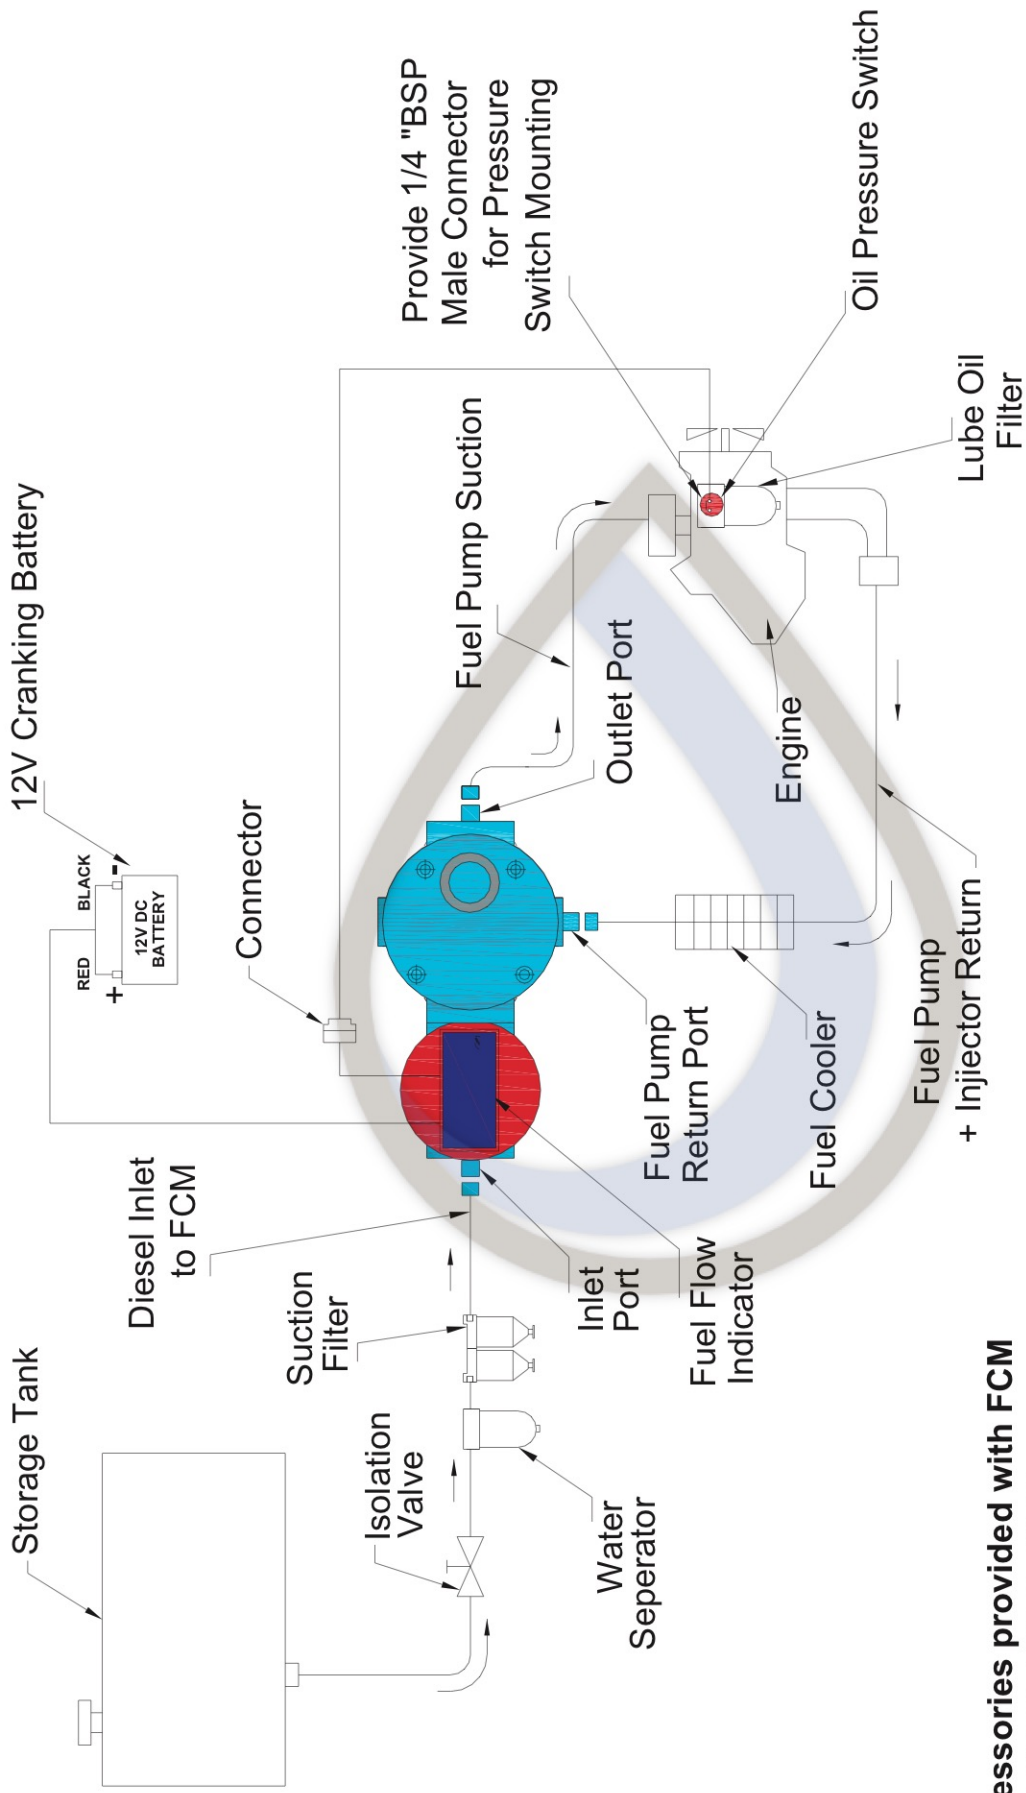


Note:-

• **Accessories provided with FCM**

- a) Set of Hose Fittings - 01 set.
- b) Mounting Frame - 01 No.
- c) Grouting Fastener
- d) Oil Pressure Switch - 01No.
- e) Instruction Manual - 01No.

• **Accessories to be provided by customer**

- a) All Hoses As Shown - 03 Nos.
- b) 12V DC Cranking Battery - 01 No.

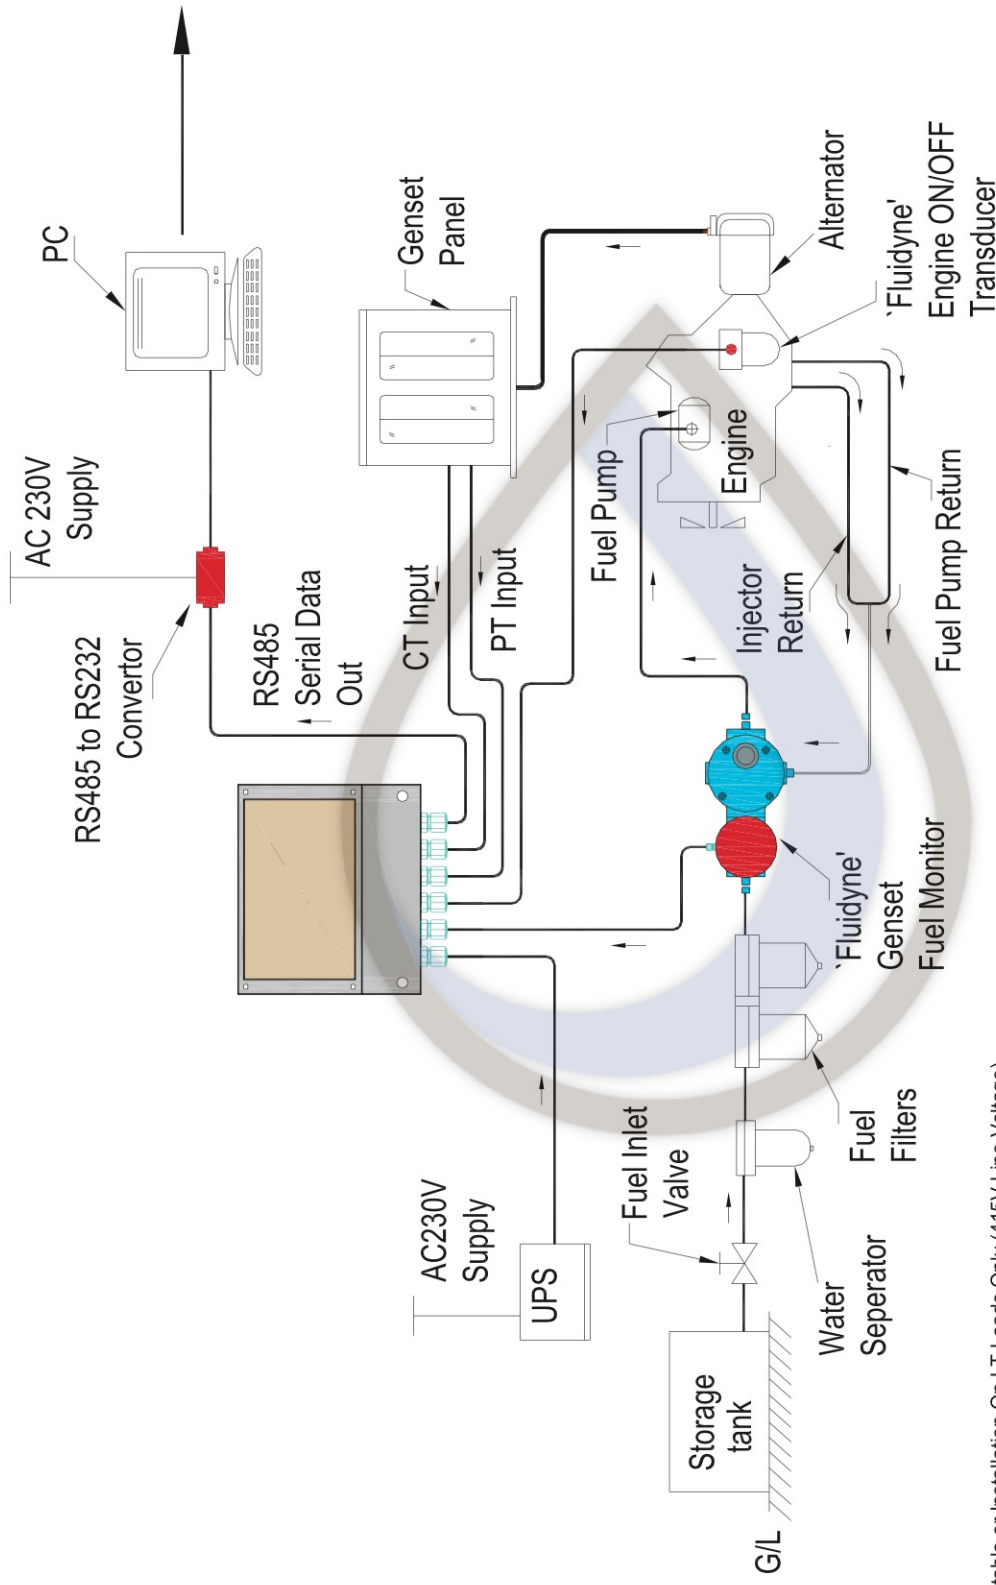

Note:-


- **General**
 - a) System Is Suitable or Installation On LT Loads Only (415V Line Voltage).
 - b) RS485 Series Data Can Be Transmitted to a Max Distance Of 1000 Mtrs.
 - c) One Genlog Instrument Can Be Used Only For One Genset.
 - d) A Max Of 16 Genlog Instrument Can Be Interfaced to One PC.

- **Accessories provided with the system**

- a) 25 Meter Cable For CTs and PTs RS485 Output and Engine ON/OFF Transducer
- b) Hose Fittings For FCM - 01 .set.
- c) CTs to Match Genset KVA Rating - 03 Nos.
- e) Instruction Manual - 01 No.

- **Accessories to be provided by Customer**

- a) All Hoses As Shown - 03 Nos.
- b) AC 230V Power Supply 5A Outlets - 02 Nos.
- c) PC With OS: Windows 98 / 2000 / XP / VISTA
- e) All Extension Cable If Installation Length Are Greater Than 25 Mtrs.

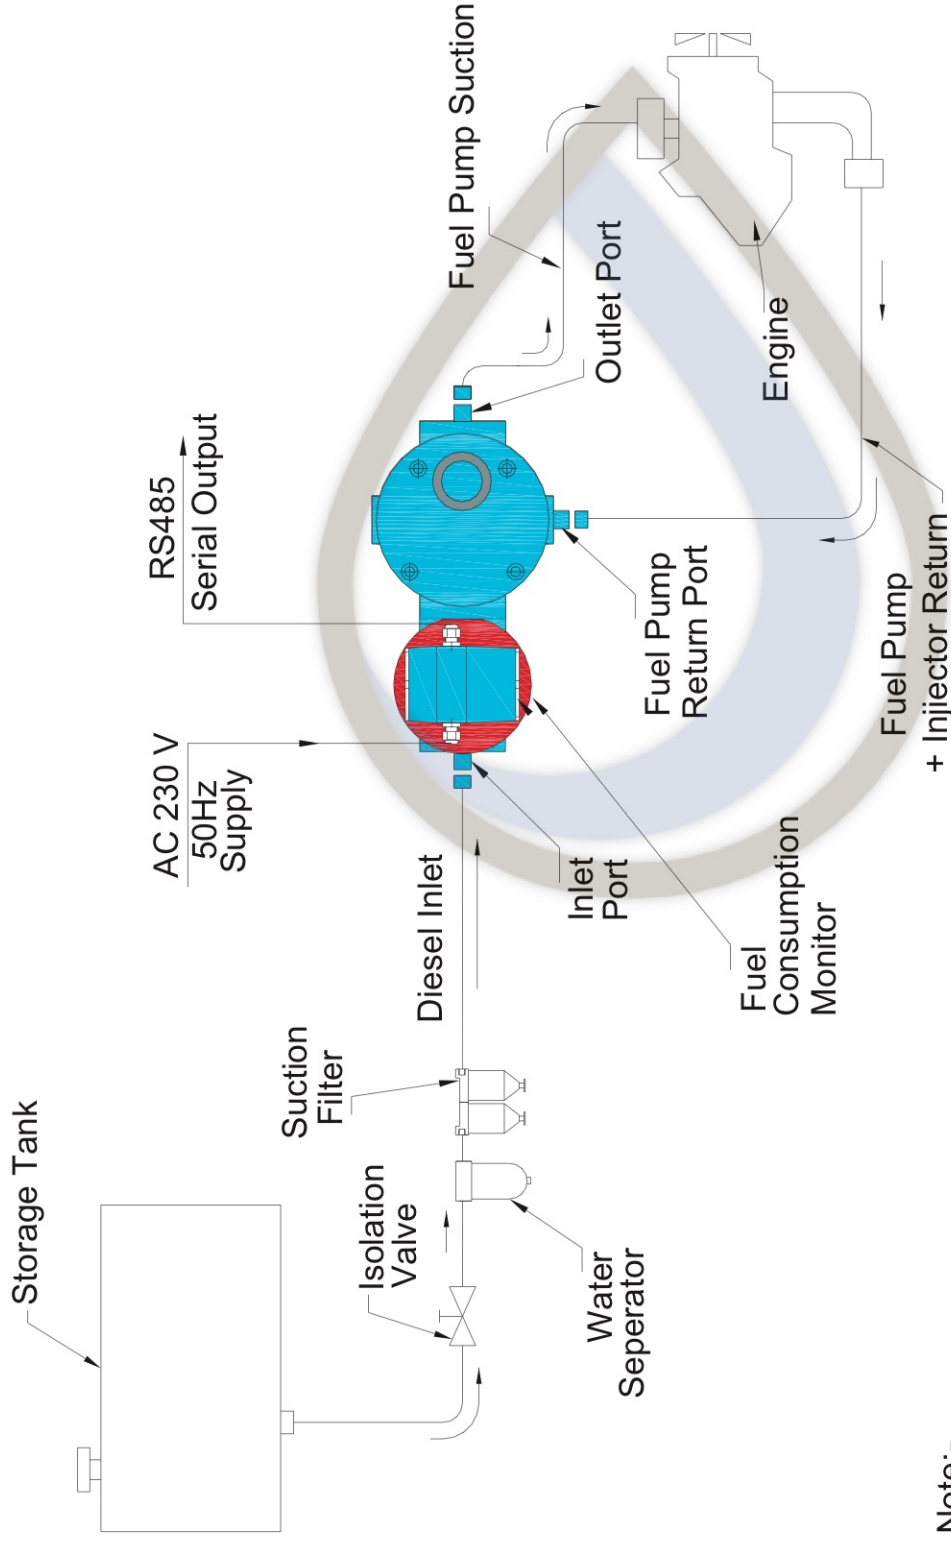


Note:-

• **Accessories provided with FCM**

- a) Set of Hose Fittings - 01 set.
- b) Mounting Frame - 01 No.
- c) Grouting Fastener
- d) Instruction Manual - 01No.

• **Accessories to be provided by Customer**

- a) All Hoses As Shown - 03 Nos.
- b) AC 230V 50 Hz Power Supply - 01 No.
- c) RS485 Communication Cable 1.0 Sq. mm 2 Core Shielded of Required Length.

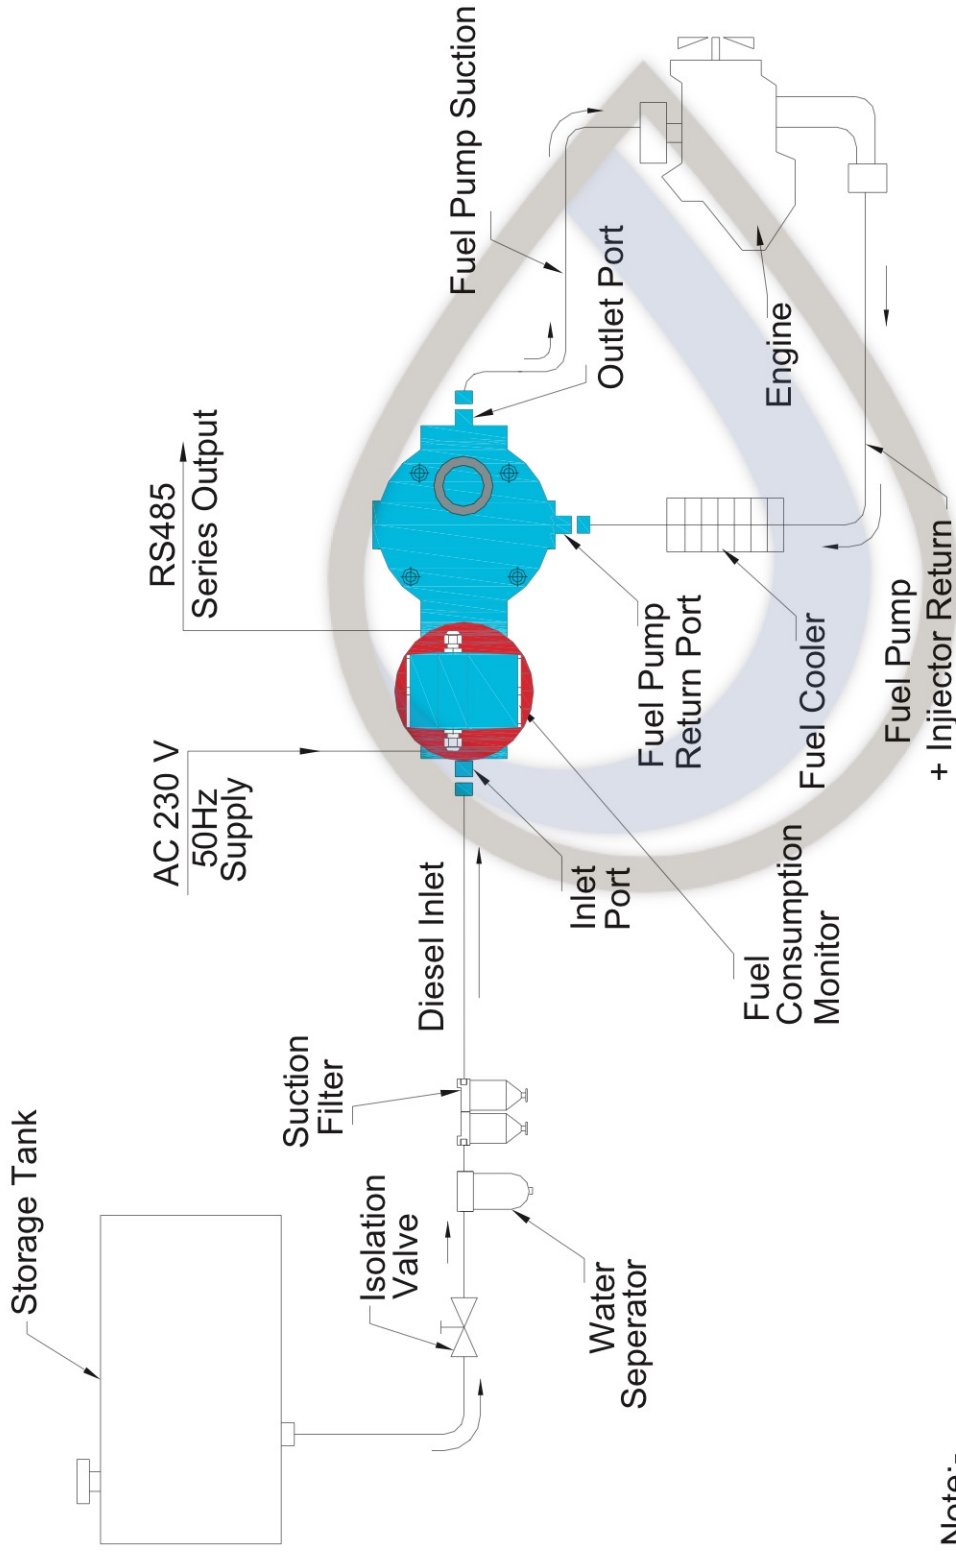

Note:-

• **Accessories provided with FCM**

- a) Set of Hose Fittings - 01 set.
- b) Mounting Frame - 01 No.
- c) Grouting Fastener
- d) Instruction Manual - 01No.

• **Accessories to be provided by Customer**

- a) All Hoses As Shown - 03 Nos.
- b) AC 230V 50 Hz Power Supply - 01 No.
- c) RS485 Communication Cable 1.0 Sq. mm 2 Core Shielded of Required Length.